

| | |
|----------|---------------|
| SPEC No. | LH14Z01A |
| ISSUE: | Feb. 17. 2015 |

To; _____

S P E C I F I C A T I O N S

Product Type _____ Laser Diode _____

Model No. _____ **GH0631IA2GC** _____

※These specifications contain 10 pages including the cover and appendix.
If you have any objections, please contact us before issuing purchasing order.

CUSTOMERS ACCEPTANCE

DATE: _____

BY: _____

PRESENTED

BY: M. Matsumoto
Dept. General Manager

REVIEWED BY:

PREPARED BY:

K. Miyazaki

N. Ohkubo

Development Dept., I
Lighting Device Division
Electronic Components And Devices Group
SHARP CORPORATION

Product name : Laser Diode

Model No. : GH0631IA2GC

1. These specification sheets include materials protected under copyright of Sharp Corporation ("Sharp"). Please do not reproduce or cause anyone to reproduce them without Sharp's consent.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets, as well as the precautions mentioned below.
Sharp assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets, and the precautions mentioned below.

(Precautions)

- (1) Please do verify the validity of this part after assembling it in customer's products, when customer wants to make catalogue and instruction manual based on the specification sheet of this part.
- (2) This product is designed for use in the following application areas ;
* OA equipment * Audio visual equipment * Home appliance
* Telecommunication equipment (Terminal) * Measuring equipment
* Tooling machines * Computers
If the use of the product in the above application areas is for equipment listed in paragraphs (3) or (4), please be sure to observe the precautions given in those respective paragraphs.
- (3) Appropriate measures, such as fail-safe design and redundant design considering the safety design of the overall system and equipment, should be taken to ensure reliability and safety when this product is used for equipment which demands high reliability and safety in function and precision, such as ;
* Transportation control and safety equipment (aircraft, train, automobile etc.)
* Traffic signals * Gas leakage sensor breakers * Rescue and security equipment
* Other safety equipment
- (4) Please do not use this product for equipment which require extremely high reliability and safety in function and precision, such as ;
* Space equipment * Telecommunication equipment (for trunk lines)
* Nuclear power control equipment * Medical equipment
- (5) Please contact and consult with a Sharp sales representative if there are any questions regarding interpretation of the above four paragraphs.

3. Please contact and consult with a Sharp sales representative for any questions about this product.

SPEC. No. LH14Z01A

1. Scope

This specification covers the appearance and characteristics of red Laser Diode,
Model No. GH0631IA2GC


【Outline of this product】

This product is equipped with an GaInP multiple quantum well red laser diode .
Oscillating transverse mode of this model is TE.

This product is designed for a sensor, leader bar code and display light sources.

- | | |
|--|-----------------------|
| 2. Outline Dimensions and Terminal Connections | described in page 2 |
| 3. Ratings and Characteristics | described in page 3 |
| 4. Reliability | described in page 4 |
| 5. Incoming inspection | described in page 5 |
| 6. Supplements | |
| 6-1. ODS materials | described in page 5 |
| 6-2. RoHS compliant product | described in page 5 |
| 6-3. Chemical substance information in the product | described in page 5 |
| 6-4. Packing | described in page 6 |
| 6-5. Matters relating to disclaimers | described in page 7 |
| 7. Operating and handling precautions | described in page 7,8 |

2. Outline dimensions and Terminal connections

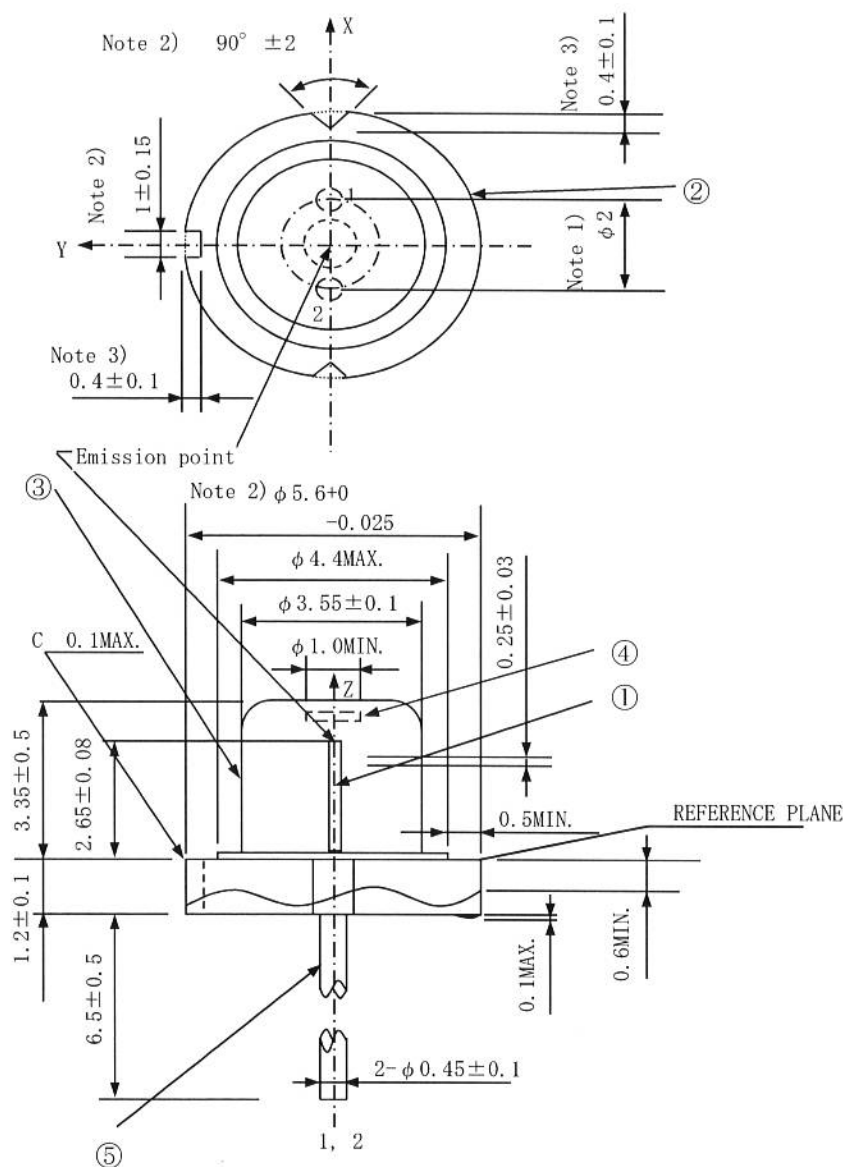


Note 1) Dimension of the bottom of leads.

Note 2) These dimensions are valid only in the range of 0 ~ 0.6mm below from the reference plane.


Note 3) These dimensions are defined from the imaginary circle which goes through the three points around the stem to the bottom of cut off parts.

Enlarged drawing around the emission point



Center of the imaginary circle which goes through the three points around the stem

Terminal connections



Mass of the product :

0.32g (reference value)

Marking

Position : side of a cap

Printed contents :



(4 Character)

- ① Year of production
- ② Month of production
- ③ Model name
- ④ Production lot

The alphanumeric character indicating the above is printed.

GENERAL TOLERANCES ± 0.2

UNIT:mm

| No. | Component | Material | Finish |
|-----|------------------|---------------------|--|
| ① | Laser Diode Chip | AlGaInP/GaAs | - |
| ② | Stem | Cu/Fe | Gold-plated |
| ③ | Cap | 45 alloy | Nickel+Pd plated |
| ④ | Window glass | Borosilicated glass | Typ. $n=1.52$ ($\lambda_p = 642\text{nm}$) |
| ⑤ | Lead pins | Ni/Fe | Gold-plated |

SPEC. No. LH14Z01A

3. Ratings and Characteristics

3-1 Absolute Maximum Ratings

(Tc=25°C (Note 1))

| Parameter | | | Symbol | Value | Unit |
|--|----|--|--------|-----------|------|
| Optical power output | CW | $-10^{\circ}\text{C} \leq T_c \leq 40^{\circ}\text{C}$ | Po | 185 | mW |
| | CW | $40^{\circ}\text{C} < T_c \leq 60^{\circ}\text{C}$ | Po | 120 | mW |
| Reverse voltage | | | Vr1 | 2 | V |
| Operating temperature (Case temperature) | | | Top(c) | -10 ~ +60 | °C |
| Storage temperature | | | Tstg | -40 ~ +85 | °C |
| Soldering temperature (Note 2) | | | Tsld | 350 | °C |

(Note 1) Tc : Case temperature

(Note 2) Soldering temperature means soldering iron tip temperature (The power 30W) while soldering.
Soldering position is 1.0mm apart from bottom edge of the case. (Immersion time: $\leq 3\text{s}$)

3-2 Electro-optical Characteristics

(Tc=25°C (Note 1))

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|------------------------|---|------|------|------|-------|
| Threshold current | Ith | — | — | 70 | 90 | mA |
| Operating current | Iop | Po=180mW | — | 215 | 240 | mA |
| Operating voltage | Vop | | — | 2.55 | 3.0 | V |
| Wavelength (Note 4) | λ_p | | 635 | 638 | 643 | nm |
| Half Intensity Angle(Parallel) (Note 2, 3) | $\theta_{//}$ | | 4 | 8 | 12 | ° |
| Half Intensity Angle(Perpendicular) (Note 2, 3) | θ_{\perp} | | 8 | 13 | 18 | ° |
| Misalignment angle (Parallel) (Note 3) | $\Delta\theta_{//}$ | | -5 | — | 5 | ° |
| Misalignment angle (Perpendicular) (Note 3) | $\Delta\theta_{\perp}$ | | -5 | — | 5 | ° |
| Differential efficiency | η_d | $\frac{150\text{mW}}{I(180\text{mW}) - I(30\text{mW})}$ | 0.9 | 1.15 | — | mW/mA |

(Note 1) Initial value, Continuous Wave Operation

(Note 2) Angle of 50% peak intensity (Full angle at half-maximum)

(Note 3) Parallel to the junction plane(X-Z plane)

Perpendicular to the junction plane(Y-Z plane)

(Note 4) It is based on method for measurement of light spectrum analyzer Q8344A
made by Advantest Corp. of Sharp Corp. property.

4. Reliability

4-1 The reliability of products satisfy all the items listed below.

Reference Standards : JIS

Confidence level : 90%

| No. | Test | Test Conditions | Samples:n | Defective:C | LTPD(%) | Failure criteria No. [4-2] |
|-----|---|--|-----------|-------------|---------|----------------------------|
| 1 | Solderability | Soldering temperature: $240 \pm 5^{\circ}\text{C}$ (Flux used) Immersion time: $5 \pm 0.5\text{s}$ | 11 | 0 | 20 | 1 |
| 2 | Resistance to soldering | Soldering iron tip temperature: $350 \pm 0^{\circ}\text{C} / -5^{\circ}\text{C}$ Immersion time: $3+0\text{s} / -1\text{s}$ (Note 1) | 11 | 0 | 20 | 3, 4, 5 |
| 3 | Terminal strength (Tensile test) | Load: 5N Duration: $5 \pm 1\text{s}$ Once for each terminal | 11 | 0 | 20 | 2 |
| 4 | Terminal strength (Bending test) | Load: 2.5N $0^{\circ} \sim 90^{\circ} \sim 0^{\circ} \sim -90^{\circ} \sim 0^{\circ}$ Once for each terminal | 11 | 0 | 20 | 2 |
| 5 | Mechanical shock | Acceleration: $1,000\text{m/s}^2$ Pulse width: 6ms Direction: $\pm X, \pm Y$ and $\pm Z$ Three times for each direction | 11 | 0 | 20 | 3, 4, 5 |
| 6 | Variable frequency vibration | Acceleration: 100m/s^2 or Amplitude: 1.5mm Frequency: 10~500~10Hz 15min reciprocation Direction: X, Y and Z 2 h for each direction | 11 | 0 | 20 | 3, 4, 5 |
| 7 | Temperature cycling | Lower temperature: -40°C Higher temperature: $+85^{\circ}\text{C}$ Duration: 30min each, 30 times | 11 | 0 | 20 | 3, 4, 5 |
| 8 | High temperature storage | Storage temperature: 85°C $t=500\text{ h}$ | 11 | 0 | 20 | 3, 4, 5 |
| 9 | Low temperature storage | Storage temperature: -40°C $t=500\text{ h}$ | 11 | 0 | 20 | 3, 4, 5 |
| 10 | High temperature Humid atmosphere storage | Storage temperature: 40°C (Note 2) humidity: $90\%\text{RH}$ $t=100\text{h}$ | 11 | 0 | 20 | 3, 4, 5 |

(Note 1) Soldering position is 1.0mm apart from bottom edge of the case.

(Note 2) To be measured after 72 hours exposure to the room atmosphere.

4-2 Parameters to be measured and Failure criteria

| No. | Parameters | Failure judgment criteria |
|-----|-------------------|---|
| 1 | Solderability | 95% or more is covered with solder. |
| 2 | Terminal strength | It is defective if there are breaking and loosening. |
| 3 | Threshold current | $I_{th} > \text{initial value} \times 1.3$, $I_{th} < \text{initial value} \times 0.7$ |
| 4 | Operating current | $I_{op} > \text{initial value} \times 1.3$, $I_{op} < \text{initial value} \times 0.7$ |
| 5 | Operating voltage | $V_{op} > \text{initial value} \times 1.2$, $V_{op} < \text{initial value} \times 0.8$ |

4-3 Lifetime Test

The target mean time to failure (MTTF) of this product is more than 2,000h. MTTF is confirmed by performing the operating test under the following conditions in time of development or change process related to the reliability of this product.

Samples tested should have a laser diode chip with the same structure of this model.

| Conditions | Failure judgment criteria |
|--|--|
| $T_c=60^{\circ}\text{C}$, $P_p=120\text{mW}$, APC drive (Note 2) 500 hours | Failure is defined as the time under the operating current under the conditions in the left changes $\pm 30\%$ of the initial (12 h) value. (Note 1) As for the samples which do not fail within 500 hours, their life time is calculated by extrapolating operating current data of between 400 and 500 hours. MTTF is estimated by plotting each life time in Weibull function worksheet. |

(Note 1) Defective samples caused by surge current is rejected.

(Note 2) Auto power control

SPEC. No. LH14Z01A

5. Incoming inspection

5-1 Inspection standards ISO 2859 single sampling plan

5-2 Inspection level S-2 normal inspection

5-3 AQL

5-3-1 Definition of the lot the day shipping the product

5-3-2 Characteristics (Note 1)

| AQL | Parameter | Failure judgment criteria |
|-----|---|--------------------------------------|
| 1.0 | Ith, Iop, Vop, η d, λ p, θ //, θ \perp , $\Delta \theta$ //, $\Delta \theta$ \perp | Not conforming to the specifications |

(Note 1) Inspection is performed after blowing.

5-3-3 Appearance

| AQL | Failure judgment criteria |
|-----|--|
| 1.0 | Crack is found on the window glass. Marking is not sufficiently clear to read. Bent lead can not be restored. Impurity or dust its size is over $50\mu\text{m} \times 50\mu\text{m}$ is found within $0.5\text{mm}\phi$ to the center of the window glass. (Note.2) |
| 2.5 | Diameter of stem is not conforming the specification |

(Note2) Inspection is performed after blowing.

6. Supplements

6-1 ODS materials

This product shall not contain the following materials. Also, the following materials shall not be used in the production process for this product.

Materials for ODS : CFCs, Halon, Carbon tetrachloride, 1,1,1-Trichloroethane (Methyl chloroform)

6-2 RoHS compliant product

This product complies with the RoHS Directive (2011/65/EU) and manufactured in accordance with Sharp's Green Device Guidelines.

6-3 Information relating to China RoHS.

Product Information Notification based on Chinese law, Management Methods for Controlling Pollution by Electronic Information Products.

Names and Contents of the Toxic and Hazardous Substances or Elements in the Product

| Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Hexavalent Chromium (Cr(VI)) | Polybrominated Biphenyls (PBB) | Polybrominated Diphenyl Ethers (PBDE) |
|-----------|--------------|--------------|------------------------------|--------------------------------|---------------------------------------|
| ○ | ○ | ○ | ○ | ○ | ○ |

This table was created pursuant to the provisions of SJ / T 11364.

○ : indicates that the content of the toxic and hazardous substance in all the homogeneous materials of the part is below the concentration limit requirement as described in GB/T26572.

× : indicates that the content of the toxic and hazardous substance in at least one homogeneous material of the part exceeds the concentration limit requirement as described in GB/T26572 standard.

6-4. Packing


6-4-1. Packing method

- (1) Laser diodes are arranged in a laser tray.
- (2) One tray can accommodate 200 lasers. 5 trays wherein the laser diodes are arranged are stacked up.
- (3) A cover tray is stacked as a cover on the tray wherein the laser diodes are arranged. Stacked trays including a cover are bound with adhesive tape.
- (4) The above bound trays are stuffed into a clean-bag. The bag is sealed by dissolving thermally. One tray can accommodate 200 lasers.
- (5) The trays in the bag are put into a packing case. One packing case can accommodate 2,000 lasers maximum, which is the minimum unit of packing. A Label where in the model number, quantity and lot number are printed is stuck on both of the bag and the case(Refer to 6-4-4).

6-4-2. Materials for packing

| No. | Component parts | Material |
|-----|-----------------|------------------------------|
| 1 | Laser tray | conductive polystyrene resin |
| 2 | Cover tray | conductive polystyrene resin |
| 3 | Clean-bag | anti - static plastic |
| 4 | Packing case | cardboard |
| 5 | shock absorber | anti - static polyetyrene |

6-4-3. External appearance of packing

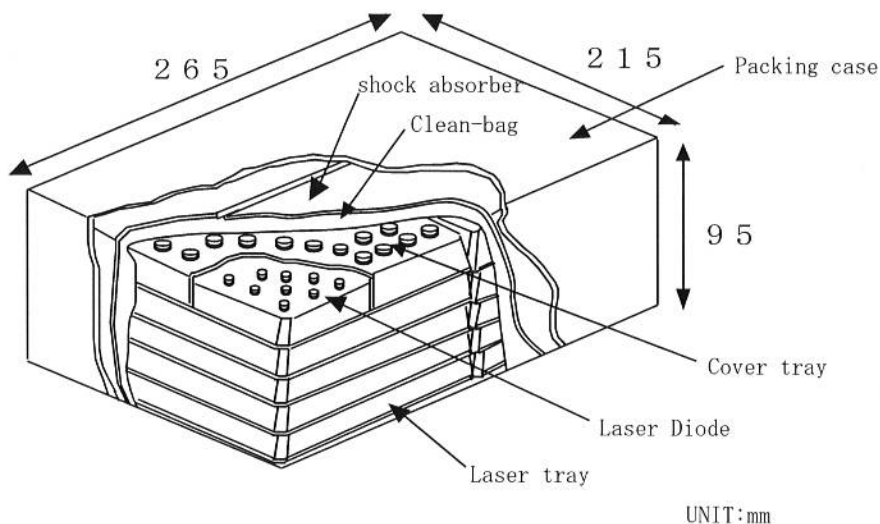

6-4-4. Label

(1)A label on the clean-bag

| | |
|---|---------------------|
| TYPE | Model name (Note 2) |
| Q'TY | 1000 |
| LOT | Lot No. |
| SHARP CORPORATION MADE IN ****(Note 1) R.C. (Note 3) | |

(2)A label on the packing case

| | |
|---|---------------------|
| TYPE | Model name (Note 2) |
| Q'TY | 2000 |
| LOT | Lot No. |
| SHARP CORPORATION MADE IN ****(Note 1) R.C. (Note 3) | |

(Note 1) ****:Production country

(Note 2) A management number in the factory is written in (), if the product produced in a factory except Japan.

(Note 3) This identification mark shows the settlement product for RoHS designed by using a green material based on our green device guideline.

6-5. Matters relating to disclaimers

The following contents related to failure and accident of this product, we do not assume the responsibility.

- (1) Due to the storage deficiencies in the inventory period on sales channels
- (2) Due to willful, negligence, handling failure
- (3) Due to this product connection or mounted equipment
- (4) Due to natural disasters, fire, water damage or, the disaster analogous thereto
- (5) Due to external factors such as abnormal voltage, abnormal electromagnetic waves, and catch fire, etc.
- (6) Due to the special environment (factory, coastal area, hot spring area, etc.)
- (7) Due to mounting deficiencies
- (8) Due to the repair of this product
- (9) Other things due to those not included in the product specification

7. Operating and handling precautions

- (1) This product has its life. The product life which is described in "Reliability" should be taken into account when using it.
- (2) This product will be damaged by electrostatic discharge(ESD). Following precautions should be taken to avoid ESD damage.
 - ⇒ Workers, workbenches and other equipment should always be grounded. Workers should always wear an antistatic wrist strap and an antistatic smock on them.
 - ⇒ When handling this product, workers should always wear antistatic gloves or finger covers.
 - ⇒ A stable DC power supply which is free from electrical transients should always be used when operating this product. A slow starter circuit should always be inserted between the power supply and this product in order to protect it from DC power surges.
 - ⇒ Optical power output of this product should be set with a highly reliable and high quality variable resistance.
 - ⇒ This product should always be connected to the driving circuit by soldering directly or through highly reliable connectors.
 - ⇒ While this product is being operated, be sure to avoid touching the driving circuit or the terminals of this product with electrical probes from a synchroscope or a voltmeter.
 - ⇒ An antistatic package should be used when storing this product.
 - ⇒ This product should be processed in the rooms where relative humidity is kept at 50-70%RH.
- (3) This product doesn't do the design that intends use in the following, special environment. Please use it after confirming the performance and reliability, etc. enough in your company before use in the following special environment.
 - ⇒ Use in place where a lot of moisture, be dewys, sea breezes, or causticity gases (Cl, H2S, NH3, SO2, and NOX, etc.) exist.
 - ⇒ Use under direct sunshine, in out-of-door exposure, or in dust.
 - ⇒ Use in atmosphere such as water, oil, drug solutions, or organic solvents.
 - ⇒ Use in environment with strong static electricity or electromagnetic radiation.
 - ⇒ Use in state installed near generation of heat parts or in state to arrange combustibile near this product.
- (4) Because the adhesion of garbage and dust to the window glass might disarrange an optical characteristic of this product, maintain the work room to cleanness so as not generate dust, please.
- (5) In this Product, generation of heat happens in the laser chip because of operating. The case temperature rises by this generation of heat. Because the rise of the case temperature becomes a factor to shorten the lifetime of this product, a sufficient heat sink should be attached to this product when operating so that its case temperature is to be maintained at the same level as that of the surrounding.

7. Operating and handling precautions

- (6) Even if the drive current supply has an automatic power control (APC), automatic current control (ACC), or both, be sure to monitor the optical power output with an optical power meter while setting it. Never estimate the optical power output only from the drive current because it is likely to be decreased by temperature rise of the surrounding.
- (7) When dirt adheres to the window glass of this product, please wipe lightly with the cotton bud that adheres the ethanol.
- (8) The window glass cracks easily because it is thin. Therefore, please avoid putting the load on the cap, for example clumping, tightens, or fixing to the treatment device hard.
- (9) Since laser beam from this product will be harmful to the human eyes, the following precautions should be taken.
 - ⇒ When this product is being operated, the emitting surface of a chip should not be viewed either directly or through a lens, microscope or optical fibers.
 - ⇒ When operating this product, wear safety glasses.
- (10) When soldering this product, heat lead pins only using a soldering iron in short time. Avoid heat the whole package using pre-heat or reflow soldering.