
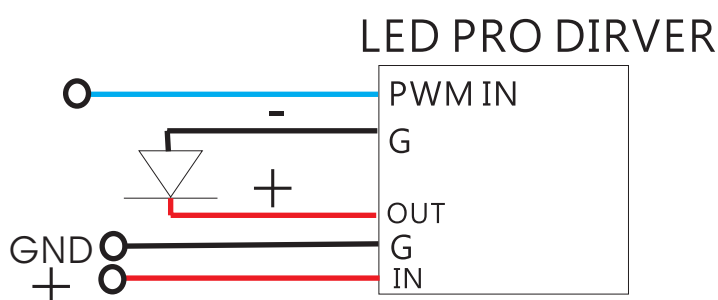


LED PRO DIRVER

KOODYZ
LED-SHOP

KOODYZ Technology Co., Ltd

the LED PRO DIRVER is a high efficiency, constant current, step-down DC/DC converter, designed to deliver constant current to high power LED with only 4 external components. The LED PRO DIRVER is specifically designed with hysteretic PFM control scheme to enhance the efficiency up to 93%

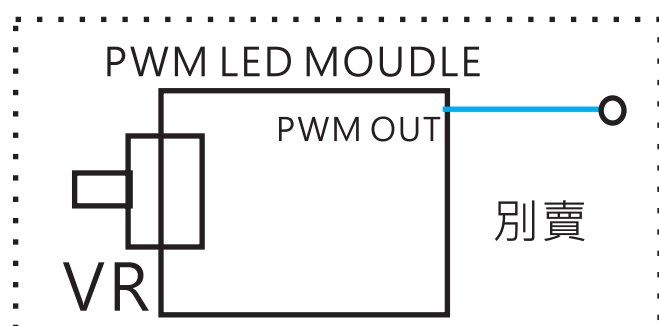

Model Number: LED PRO DIRVER-XXX

X = current: 350, 700, 1000,)

Length: mm 34±1mm

Width: mm 16.1±0.2mm

Depth: mm 7.2±0.2mm

weight: 4.8g

Input Voltage min: DC 5V max DC 17V

Max Current : 350 TYPE = 350mA

700 TYPE = 700mA, 1000 TYPE = 1A

Minimum Input Voltage: LED VF + 3V

Operating Temperature -10~+60

Storage Temperature -10~+60

Storage humidity 0%~80%

定電流安定度 + -3%

最大出力容量 10W




出力短路保護 有 請勿短路過久

輸入電壓建議 LED VF + 3V, 使用時請絕緣, 非防水產品, 請勿進水

LED 脫落時, 電源要切斷

正常使用下, 產品發熱無需理會

其他電流值可訂製, 特別用途請與我們連絡

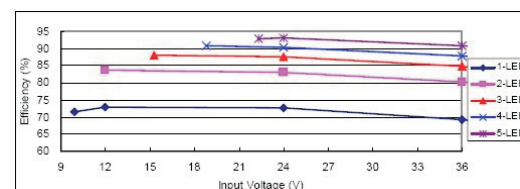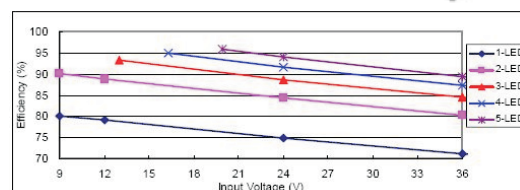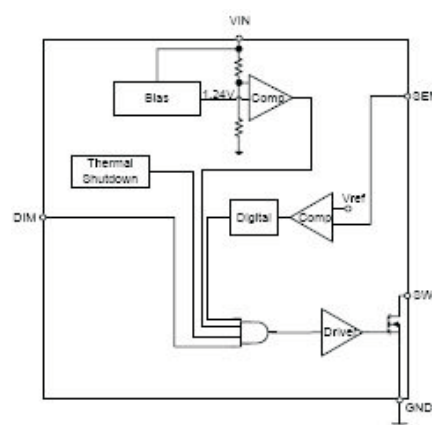

KOODYZ Technology Co., Ltd

Address: 2F No.259, Sec. 2, Zhongyang Rd., Tucheng City, Taipei County, Taiwan (R.O.C.)

mail: nax7149@hotmail.com